



## ADVANCED HEALTHCARE MANAGEMENT USING INTERNET-OF-THINGS (IOT) SENSING WITH CLOUD-BASED PROCESSING

Asst. Prof. Kawale Jayashri N. <sup>1</sup>, Asst. Prof. Punam Chaudhari<sup>2</sup>

<sup>1,2</sup>*Electronics and Telecommunication ,*

*Genba Sopanrao Moze College of Engineering Balewadi*

*(India)*

### ABSTRACT

*Smart and connected healthcare is among important the range of applications enabled by the Internet of Things (IoT). It allows us to gather the information about physical and mental health from network sensors either embedded in our body or worn peripherally. This data is continuously captured and analyzed, such information can bring about a positivetransformative change in the health care landscape. In particular, the availability of data at until unimagined scales and temporal longitudes coupled with a new generation of intelligent processing algorithms can: (a) facilitate an evolution in the practice of medicine, from the current post facto diagnose-and treat reactive paradigm, to a proactive framework for prognosisof diseases at an incipient stage, coupled with prevention, cure,and overall management of health instead of disease, (b) enablepersonalization of treatment and management options targetedparticularly to the specific circumstances and needs of theindividual, and (c) help reduce the cost of health care whilesimultaneously improving outcomes. In this paper, we highlightthe opportunities and challenges for IoT in realizing this visionof the future of health care.*

**Keywords:** *Health monitoring, internet of things, cloud, analytics*

### I. INTRODUCTION

Recent years have seen a rising interest in wearable sensors and today several devices are commercially available [1]–[3] for personal health care, fitness, and activity awareness. In addition to the niche recreational fitness arena catered to by current devices, researchers have also considered applications of such technologies in clinical applications in remote health monitoring systems for long term recording, management and clinical access to patient’s physiological information [4]–[8].

Based on current technological trends, one can readily imagine a time in the near future when your routine physical examination is preceded by a two–three day period of continuous physiological monitoring using inexpensive wearable sensors. Over this interval, the sensors would continuously record signals correlated with your key physiological parameters and relay the resulting data to a database linked with your health records. When you show up for your physical examination, the doctor has available not only conventional clinic/lab-test based static measurements of your physiological and metabolic state, but also the much richer longitudinal record provided by the sensors. Using the available data, and aided by decision support systems that also have



access to a large corpus of observation data for other individuals, the doctor can make a much better prognosis for your health and recommend treatment, early intervention, and life-style choices that are particularly effective in improving the quality of your health. Such a disruptive technology could have a transformative impact on global healthcare systems and drastically reduce healthcare costs and improve speed and accuracy for diagnoses. Technologically, the vision presented in the preceding paragraph has been feasible for a few years now. Yet, wearable sensors have, thus far, had little influence on the current clinical practice of medicine. In this paper, we focus particularly on the clinical arena and examine the opportunities afforded by available and upcoming technologies and the challenges that must be addressed in order to allow integration of these into the practice of medicine. The paper is organized as follows: Section II highlight some of the key related work in this area. In Section III, we outline the architecture for remote health monitoring systems based on wearable sensors, partitioning the system into for main components acquisition, analytics, and visualization. In Sections IV– VII we highlight the opportunities and challenges related to each of these components. We conclude the paper in Section VIII with a summary and discussion.


## II. BACKGROUND

Most proposed frameworks for remote health monitoring leverage a three tier architecture: a Wireless Body Area

Network (WBAN) consisting of wearable sensors as the data acquisition unit, communication and networking and the service layer [4], [7]–[10]. For instance [11] proposes a system that recruits wearable sensors to measure various physiological parameters such as blood pressure and body temperature Sensors transmit the gathered information to a gateway server through a Bluetooth connection. The gateway server turns the data into an Observation and Measurement file and stores it on a remote server for later retrieval by clinicians through the Internet. Utilizing a similar cloud based medical data storage, a health monitoring system is presented in [12] in which medical staff can access the stored data online through content service application. Targeting a specific medical application, WANDA [13] an end to end remote health monitoring and analytics system is presented for supervision of patients with high risk of heart failure. In addition to the technology for data gathering, storage and access, medical data analysis and visualization are critical components of remote health monitoring systems. Accurate diagnoses and monitoring of patient's medical condition relies on analysis of medical records containing various physiological characteristics over a long period of time. Dealing with data of high dimensionality in both time and quantity makes data analysis task quite frustrating and error prone for clinicians. Although the use of data mining and visualization techniques had previously been addressed as a solution to the aforementioned challenge [14], [15], these methods have only recently gained attention in remote health monitoring systems [16], [17]. A device utilizing the IoT scheme is uniquely addressed and identifiable at anytime and anywhere through the Internet. IoT based devices in remote health monitoring systems are not only capable of the conventional sensing tasks but can also exchange information with each other, automatically connect to and exchange information with health institutes through the Internet, significantly simplifying set up and administration tasks. As exemplified in [19], such systems are able to provide services such as automatic alarm to the nearest healthcare institute in the event of a critical accident for a supervised patient.

### III. SYSTEM ARCHITECTURE

Figure 1 illustrates the system architecture for a remote health monitoring system, whose major components we describe next: **Data Acquisition** is performed by multiple wearable sensors that measure physiological biomarkers, such as ECG, skin temperature, respiratory rate, EMG muscle activity, and gait (posture). The sensors connect to the network through an intermediate data aggregator or concentrator, which is typically a smart phone located in the vicinity of the patient. The **Data Transmission** components of the system are responsible for conveying recordings of the patient from the patient’s house (or any remote location) to the data center of the Healthcare Organization (HCO) with assured security and privacy, ideally in near real-time. Typically, the sensory acquisition platform is equipped with a short range radio such as Zigbee or low-power Bluetooth, which it uses to transfer sensor data to the concentrator. Aggregated data is further relayed to a HCO for long term storage using Internet connectivity on the concentrator, typically via a smart phone’s WiFi or cellular data connection. Sensors in the data acquisition part form an Internet of Things (IoT) based architecture as each individual sensor’s data can be accessed through the Internet via the concentrator [20], [21].

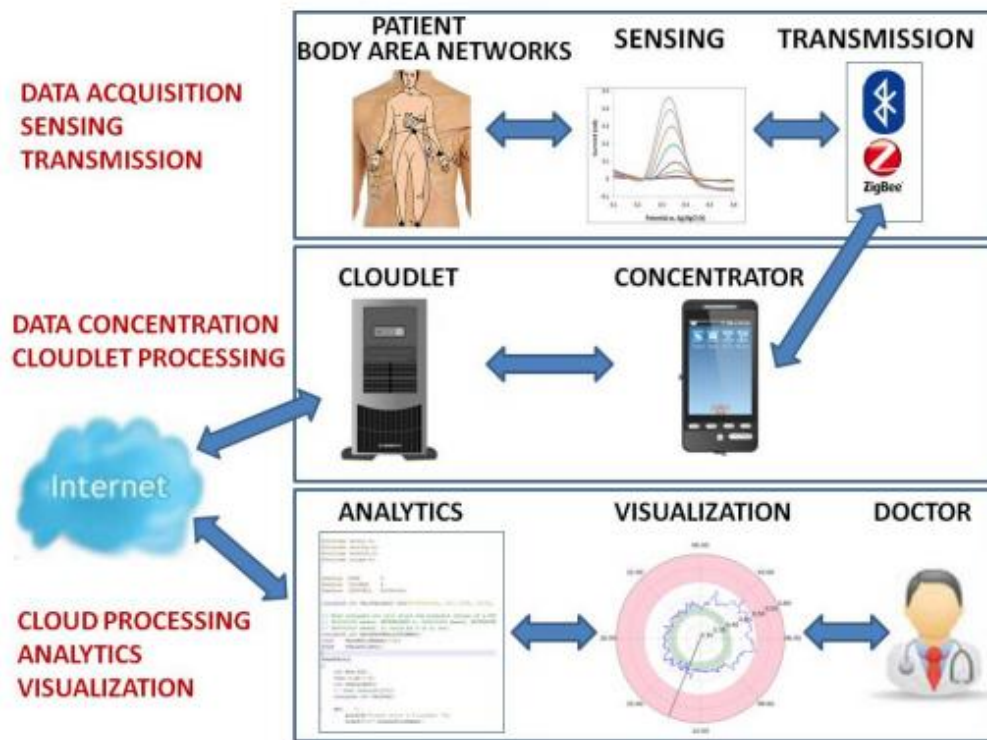

**“Fig. 1. Components of a remote patient monitoring system that is based on an IoT-Cloud architecture”**

Often a storage/processing device in vicinity of a mobile client, sometimes referred to as a cloudlet, is used to augment its storage/processing capability whenever the local mobile resources do not fulfill the application’s requirements [22]. The cloudlet can be a local processing unit (such as a desktop computer) which is directly accessible by the concentrator through WiFi network. In addition to providing temporary storage prior to communication of data to the cloud, the cloudlet can also be used for running time critical tasks on the patient’s aggregated data. Moreover, the cloudlet can be used to transmit the aggregated data to the cloud in case of limitations on the mobile device such as temporary lack of connectivity or energy. Cloud Processing has three



distinct components: storage, analytics, and visualization. The system is designed for long term storage of patient's biomedical information as well assisting health professionals with diagnostic information. Cloud based medical data storage and the upfront challenges have been extensively addressed in the literature [23], [24]. Analytics that use the sensor data along with e-Health records that are becoming prevalent can help with diagnoses and prognoses for a number of health conditions and diseases. Additionally, *Visualization* is a key requirement for any such system because it is impractical to ask physicians to pore over the voluminous data or analyses from wearable sensors. Visualization methods that make the data and analyses accessible to them in a readily digestible format are essential if the wearable sensors are to impact clinical practice. In the following sections, we consider the key elements of the overall system illustrated in Fig. 1 and highlight the opportunities and challenges for each in integrating remote health monitoring into clinical practice.

Table 1. List of Available (Top) and Future (Bottom) Sensors and Their Applicability to Detecting Health Conditions Related To Three Common Disease Categories: Cardiovascular Diseases (Cvd), Chronic Obstructive Pulmonary Disease (Copd) [26], And Parkinson's/Huntington's Diseases (Pd) [27], [28]. YY Indicates High Applicability, Y Indicates Some Applicability, and ? Indicates Undetermined Applicability

Bio marker	CVD	COPD	PD/HD	Diabetes
Gait (Posture)	YY	YY	YY	?
ECG	YY	YY	Y	Y
Respiratory rate	YY	YY	Y	?
Skin Temperature	Y	Y	Y	Y
Surface EMG	Y	Y	Y	?
Sweating	?	?	Y	?
Blood Pressure	YY	Y	Y	Y
Body Movement	Y	?	YY	?
Blood Glucose	?	?	?	YY
Heart Sound	Y	Y	?	?
Oxygen	YY	YY	?	?
Title volume	YY	YY	Y	?

## IV. DATA ACQUISITION AND SENSING

Physiological data is acquired by wearable devices that combine miniature sensors capable of measuring various physiological parameters, minor preprocessing hardware and a communications platform for transmitting the measured data. Table I summarizes various biomarkers that can be measured by current or soon-to-be-available wearable sensors. The level of applicability of these biomarkers to diagnosing four common disease categories is also indicated in the table. The wear ability requirement, poses physical limitations on the design of the sensors. The sensors must be light, small, and should not hinder a patient's movements and mobility. Also, because they need to operate on small batteries included in the wearable package, they need to be energy efficient. Though the battery may be rechargeable or replaceable, for convenience and to ensure that data is not lost during recharging or battery replacement periods, it is highly desirable that they provide extended durations of continuous operation without requiring charging or replacement.

The low energy operation requirement can also pose a challenge for the quality of the data captured in terms of the achievable signal to noise ratio. Recent designs [5], [29],[30] of flexible sensors that can be placed in contact with the skin in different body parts are particularly attractive for medical applications because, compared to



alternatives, the close contact with the skin allows measurement of more physiological parameters and with greater accuracy. There have also been efforts to prolong the operational lifetime of wearable sensors by incorporating low power device and circuit level techniques and energy harvesting methods. Moreover, utilizing intelligent sensing methods on system level can further increase the operational longevity. Energy efficient sensing mechanisms have been studied in the related context of wireless sensor networks (WSNs) that are used to sense physical phenomenon in a distributed fashion. Although the sensor deployment in our health monitoring system is more concentrated compared to WSNs, existing methods for WSNs can be revisited to suit our needs. The proposed energy efficient sensing approaches revolve around assigning sensing tasks to the nodes based on their relative distance so as to sense the maximum amount of physical information while minimizing the energy consumption by removing possible redundant sensing tasks and by allocation of tasks based on the energy availability at each sensor. Similar mechanisms can be applied to our system by defining and using a dynamic context that is based on energy availability and the health condition of the patient. For example, as indicated in Table I, individually sensed biomarkers have different levels of applicability for specific health conditions. When energy is severely limited and the vulnerable condition of the patient mandates focus on a specific biomarker, the other sensors be powered off in order to extend the lifetime. An IoT based sensing architecture facilitates the implementation of such schemes for improving energy efficiency adaptively by allowing dynamic utilization of sensors based on the context. In conventional data acquisition systems where sensors passively transmit the gathered information, such intelligence and flexibility may not be achievable. Also by offloading the decision making process for sensing task assignment to the cloud, more sophisticated algorithms can be applied without requiring manual intervention by the patient to manipulate the sensors or the software on the dataconcentrator. Energy limitation of these devices necessitates the use of suitable low power communication protocols, as the communication can account a significant part of the power consumption in sensing devices. ZigBee over IEEE 802.15.4 is commonly used in low rate WPANs (LR-WPANs) to support communication between low power devices that operate in personal operating space (POS) of approximately 10m. ZigBee provides reliable mesh networking with extended battery life. Bluetooth low energy (BLE) is another wireless communication protocol suitable for low power short range communication suitable for the unique requirements of applications such as health monitoring, sports, and home entertainment. The original Bluetooth protocol (IEEE 802.15.1) was designed to support relatively short range communication for applications of a streaming nature, such as audio. BLE modifies the framework by utilizing much longer sleep intervals to decrease the overall energy consumption. BLE achieves higher energy efficiency in terms of number of bytes sent per Joule of energy. When using the aforementioned communication protocols, an intermediate node (data concentrator) is necessary to make sensors data and control accessible through Internet. To further realize the IoT concept, IPv6 over Low Power Wireless Personal Area Networks (6LoWPAN) has been proposed to seamlessly connect energy constrained WPAN devices to the Internet [19]. 6LoWPAN defines fragmentation techniques to fit IPv6 datagram into IEEE 802.15.4 limited frame size to provide IP access to low power, low complexity sensing devices





## V. CLOUD DATA STORAGE AND PROCESSING

In this section, we outline such cloud architectures and discuss issues that impact long term medical data storage on the cloud.

a) Hybrid Cloud/Cloudlet Architecture: Cloudlet is a limited resource computing and storage platform that eliminates the need to outsource resource intensive tasks to the enterprise cloud. Cloudlet computing has been introduced as a potential solution to deliver low latency to time critical tasks for health monitoring applications via body area networks. Communication between concentrator and cloudlet is realized through WiFi interface. Direct connection between these two entities reduces data transfer latency for time critical tasks on aggregated data. LTE access provided in concentrator can in turn be used for direct data transfer from the concentrator to the cloud bypassing the cloudlet, while exposing the data to the latency imposed by mobile network.

b) Context-Aware Concentration via Smart Devices: As previously indicated, smart phones can act as concentrators in IoT infrastructure as today's smart phones can use both LTE and WiFi as the backhaul network. Data aggregation can be carried on either in cloudlet (through the WiFi connection between concentrator and the cloudlet) or the cloud (LTE). In studies, the former compared with the latter, has been shown to provide ten times the throughput and to require only a tenth of the access time, and half the power. Aggregated data, however, needs to be finally stored in the cloud to allow distributed access and reliable storage. To effectively partition

data aggregation tasks between cloud and cloudlet, context aware concentration may be utilized. Context can account for the current and expected status of the patient. For example, when the patient is in a critical condition requiring time critical monitoring of biosensor data, data concentration may be the preferred choice.

c) Privacy of the Data Concentrator: Although personally identifiable information can be removed before transmitting sensed data information, the system is still prone to aggregate disclosure attacks that can infer information via pattern recognition approaches. Context aware data concentration, while offering some benefits, may also make sensed information vulnerable to aggregate disclosure attacks by allowing intruder to infer a patient's health information through network traffic analysis from concentrator to mobile back haul. Standard encryption techniques can be employed to ensure security in such settings.


d) Secure Data Storage in the Cloud: Privacy is of tremendous importance when storing individual's electronic medical records on the cloud. According to the terms defined by Health Insurance Portability and Accountability Act (HIPAA), the confidential part of medical records has to be protected from disclosure. When the medical records are outsourced to the cloud for storage, appropriate privacy preserving measures need to be taken to prevent unauthorized parties from accessing the information. Secure cloud storage frameworks have therefore been proposed for use with sensitive medical records. Secure medical data processing on the cloud remains a challenge.

## VI. ANALYTICS

Compared with the lab and office based measurements that are the workhorses of current clinical medical practice,

wearable sensors can readily incorporate multiple physiological measurements and enable gathering of data with much finer temporal sampling over much longer longitudinal time scales. These rich data sets represent a

tremendous opportunity for data analytics: machine learning algorithms can potentially recognize correlations between sensor observations and clinical diagnoses, and by using these datasets over longer durations of time and by pooling across a large user base, improve medical diagnostics. As in other big data applications, the use of analytics here can improve accuracy, allow earlier detection, enable personalization, and reduce cost by reducing expensive lab procedures that are unnecessary. Analytics on wearable sensor data can conceptually utilize a wide-range of pattern recognition and machine learning techniques that have matured significantly and are now commonly available as toolboxes in several software packages. Several challenges must, however, be overcome before analytics can be deployed on any meaningful scale.

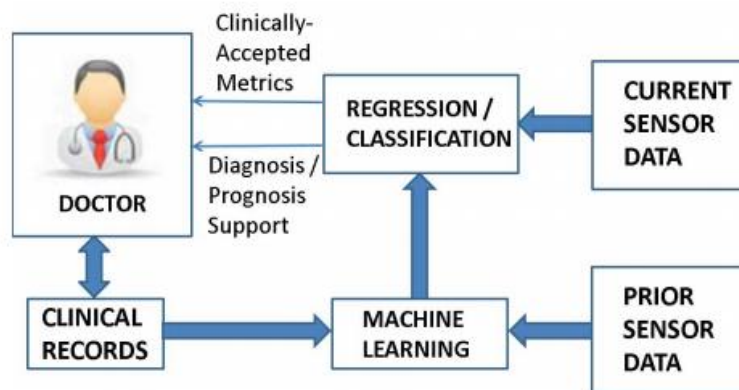


**“Fig. 2. Analytics workflow for systems integrating wearable sensor technology into clinical practice”**

## VII. VISUALIZATION

To highlight the utility of effective visualization of temporal information, we present a concrete example for cardio-vascular disease (CVD) monitoring. Holter monitor based ECG recording over durations of 24-48 hours is already utilized in CVD diagnosis. Among other things, such monitoring is useful for detecting abnormal elongation of the QT interval, which represents the duration of time taken for electrical depolarization and repolarization of the ventricles and measured on the ECG as the duration between the start of the Q-wave and the end of the T-wave. An abnormal prolongation of this interval, called *Long QT Syndrome* (LQTS) is an important indicator of potential malfunctioning of the heart. For diagnosis, a corrected value, QTc, which compensates for the natural variation in QT interval with the heart rate is more directly informative than the raw QT values. The QTc interval is usually around 400 ms in a healthy person, and may go up to 500 ms or even higher with LQTS. After a patient undergoes a holter based recording session, QTc values are commonly obtained from analyses of ECG data and available to the physician for the duration of the study (one value per heart beat). A cardiologist that has 20 patients may have access to a table containing yesterday's *two million* QTc values, which can clearly not be individually examined as raw data. In current practice, cardiologists typically spot check about 10 seconds of the patient's ECG, and review the computed average values over a full 24-hour recording. This process discards a lot of key information. In the case of LQTS, for instance, QTc could be prolonged for several minutes or even hours without the doctor noticing the problem.

The two plots shown in Figure 3 show 24 hour Holter monitoring results plotted within a circle. Midnight is the top of the plot and noon is the bottom. Low QTc values are inside the circle, and high values are along the edges. Different color bands are the QTc thresholds for *normal* (green: 360–425 ms), *borderline* (yellow: 450–500 ms), and *abnormal* (red:  $\geq 500$  ms). While the healthy patient’s QTc (top figure) always stays within the *normal* region, the unhealthy patient’s QTc (bottom figure) transitions into the *abnormal* region. These type of plots shown in Figure 3 allow for the physician to readily see and comprehend the the full temporal variation in QTc over the entire recording interval, instead of having to spot check individual values. Note also the significant change in QTc at night in Figure 3, which cannot be detected in clinical ECG monitoring done during the day. While this example focused on QTc and 24-hour observation periods, the process and framework will be similar to monitor other medical markers such as O<sub>2</sub> saturation or glucose levels, and over different time intervals. The preceding example illustrated the visualization of one parameter over the temporal duration of the recording via an informative image, which we note was static as opposed to varying with time. One can also readily present a number of parameters in parallel via one such image for each parameter. While this can be efficient for the physician to see the variation in each individual parameter at a glance, it is not as intuitive for understanding how the displayed parameters may co-vary over time. To address, this, additional visualization methods are required for visualizing the temporal dimension. The interactivity available through touch interfaces in modern mobile devices such as smartphones and tablets offers a particularly attractive opportunity for visualization of temporal relations.

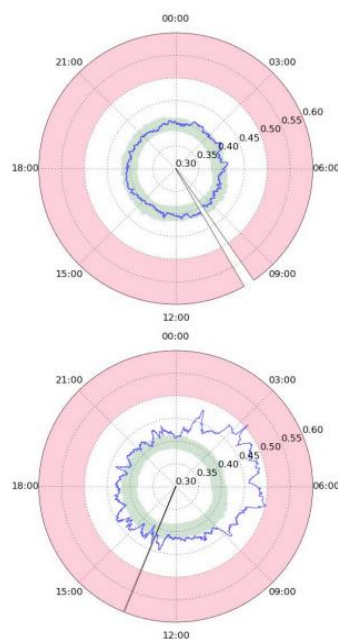

**“Fig. 3. QTc (in seconds) over 24 hours using the Bazett correction equationTop: healthy 24yo male patient. Bottom: 35yo male patient with theLQT2 genetic mutation, on beta blockers.**

**“Slices” in the plots indicate a period that was not recorded. The green band is the interquartile range for healthy male patients in the THEW database. Red represents abnormaland potentially dangerous QTc values”**





## VIII. SUMMARY AND CONCLUDING REMARKS

In this paper, we reviewed the current state and projected future directions for integration of remote health monitoring technologies into the clinical practice of medicine. Wearable sensors, particularly those equipped with IoT intelligence, offer attractive options for enabling observation and recording of data in home and work environments, over much longer durations than are currently done at office and laboratory visits. This treasure trove of data, when analyzed and presented to physicians in easy-to-assimilate visualizations has the potential for radically improving healthcare and reducing costs. We highlighted several of the challenges in sensing, analytics, and visualization that need to be addressed before systems can be designed for seamless integration into clinical practice.

## REFERENCES

- [1] Jawbone Inc., “Jawbone fitness trackers,” accessed April 2015. [Online]. Available: <https://jawbone.com/up/trackers>
- [2] FitBit Inc., “flex: Wireless activity + sleep wristband,” accessed April 2015. [Online]. Available: <https://www.fitbit.com/flex>
- [3] Apple Inc., “Apple watch,” accessed April 2015. [Online]. Available: <https://www.apple.com/watch/>
- [4] A. Pantelopoulos and N. Bourbakis, “A survey on wearable sensor-based systems for health monitoring and prognosis,” *IEEE Trans. Sys., Man, and Cybernetics, Part C: Applic. and Reviews*, vol. 40, no. 1, pp. 1–12, Jan 2010.
- [5] D. Son, J. Lee, S. Qiao, R. Ghaffari, J. Kim, J. E. Lee, C. Song, S. J. Kim, D. J. Lee, S. W. Jun, S. Yang, M. Park, J. Shin, K. Do, M. Lee, K. Kang, C. S. Hwang, N. Lu, T. Hyeon, , and D.-H. Kim, “Multifunctional wearable devices for diagnosis and therapy of movement disorders,” *Nature Nanotechnology*, pp. 1–8, 2014.
- [6] A. Page, O. Kocabas, T. Soyata, M. Aktas, and J.-P. Couderc, “CloudBased Privacy-Preserving Remote ECG Monitoring and Surveillance,” *Annals of Noninvasive Electrocardiology (ANEC)*, 2014. [Online]. Available: <http://dx.doi.org/10.1111/anec.12204>
- [7] R. Paradiso, G. Loriga, and N. Taccini, “A wearable health care system based on knitted integrated sensors,” *IEEE Trans. Info. Tech.in Biomedicine*, vol. 9, no. 3, pp. 337–344, Sept 2005.
- [8] A. Milenkovi, C. Otto, and E. Jovanov, “Wireless sensor networks for personal health monitoring: Issues and an implementation,” *Comput. Commun.*, vol. 29, no. 1314, pp. 2521 – 2533, 2006, *wirelessSenson Networks and Wired/Wireless Internet Communications*. [Online]. available:[ncedirect.com/science/article/pii/S0140366406000508](http://ncedirect.com/science/article/pii/S0140366406000508)
- [9] M. Bazzani, D. Conzon, A. Scalera, M. Spirito, and C. Trainito, “Enabling the IoT paradigm in e-health solutions through the VIRTUSmiddleware,” in *IEEE 11th Int. Conf. on Trust, Security and Privacy in Computing and Com. (TrustCom)*, June 2012, pp. 1954–1959.
- [10] A. Benharref and M. Serhani, “Novel cloud and SOA-based framework for E-Health monitoring using wireless biosensors,” *IEEE Journal of Biomed. and Health Inf.*, vol. 18, no. 1, pp. 46–55, Jan 2014



- [11] S. Babu, M. Chandini, P. Lavanya, K. Ganapathy, and V. Vaidehi, "Cloud-enabled remote health monitoring system," in *Int. Conf. on Recent Trends in Inform. Tech. (ICRTIT)*, July 2013, pp. 702–707.
- [12] C. Rolim, F. Koch, C. Westphall, J. Werner, A. Fracalossi, and G. Salvador, "A cloud computing solution for patient's data collection in health care institutions," in *Second Int. Conf. on eHealth, Telemedicine, and Social Medicine, ETELEMED '10.*, Feb 2010, pp. 95–99.
- [13] M. Lan, L. Samy, N. Alshurafa, M.-K. Suh, H. Ghasemzadeh, A. Macabasco-O'Connell, and M. Sarrafzadeh, "Wanda: An end-to-end remote health monitoring and analytics system for heart failure patients," in *Proc. of the Conf. on Wireless Health*, ser. WH '12. New York, NY, USA: ACM, 2012, pp. 9:1–9:8.
- [14] L. Wei, N. Kumar, V. Lolla, E. Keogh, S. Lonardi, C. Ratanamahatana, and H. Van Herle, "A practical tool for visualizing and data mining medical time series," in *Proc. 18th IEEE Symposium on Computer-Based Med. Sys.*, June 2005, pp. 341–346.
- [15] Y. Mao, Y. Chen, G. Hackmann, M. Chen, C. Lu, M. Kollef, and T. Bailey, "Medical data mining for early deterioration warning in general hospital wards," in *IEEE 11th Int. Conf. on Data Mining Workshops (ICDMW)*, Dec 2011, pp. 1042–1049.
- [16] V. Ukis, S. Tirunellai Rajamani, B. Balachandran, and T. Friese, "Architecture of cloud-based advanced medical image visualization solution," in *IEEE Int. Conf. on Cloud Computing in Emerging Markets (CCEM)*, Oct 2013, pp. 1–5.
- [17] B. Rao, "The role of medical data analytics in reducing health fraud and improving clinical and financial outcomes," in *Computer-Based Medical Systems (CBMS), 2013 IEEE 26th International Symposium on*, June 2013, pp. 3–3.
- [18] P. Ray, "Home health hub internet of things (H3IoT): An architectural framework for monitoring health of elderly people," in *Int. Conf. on Science Eng. and Management Research (ICSEMR)*, Nov 2014, pp. 1–3.
- [19] N. Bui and M. Zorzi, "Health care applications: A solution based on the internet of things," in *Proc. of the 4th Int. Symposium on Applied Sciences in Biomed. and Com. Tech.*, ser. ISABEL '11. New York, NY, USA: ACM, 2011, pp. 131:1–131:5.
- [20] W. Zhao, C. Wang, and Y. Nakahira, "Medical application on internet of things," in *IET Int. Conf. on Com. Tech. and Application (ICCTA 2011)*, Oct 2011, pp. 660–665.
- [21] F. Hu, D. Xie, and S. Shen, "On the application of the internet of things in the field of medical and health care," in *IEEE Int. Conf. on and IEEE Cyber, Physical and Social Computing Green Computing and Communications (GreenCom), (iThings/CPSCoM)*, Aug 2013, pp. 2053–2058.
- [22] T. Soyata, R. Muraleedharan, C. Funai, M. Kwon, and W. Heinzelman, "Cloud-Vision: Real-Time face recognition using a Mobile-Cloudlet Cloud acceleration architecture," in *Proceedings of the 17th IEEE Symposium on Computers and Communications (IEEE ISCC 2012)*, Cappadocia, Turkey, Jul 2012, pp. 59–66.



- [23] G. Nalinipriya and R. Aswin Kumar, “Extensive medical data storage with prominent symmetric algorithms on cloud - a protected framework,” in IEEE Int. Conf. on Smart Structures and Systems (ICSSS), March 2013, pp. 171–177.
- [24] A. F. M. Hani, I. V. Papatungan, M. F. Hassan, V. S. Asirvadam, and M. Daharus, “Development of private cloud storage for medical image research data,” in Int.Conf. on Computer and Inf. Sciences (ICCOINS), June 2014, pp. 1–6.
- [25] “World health organization factsheets: Cardiovascular diseases (CVDs),” online, accessed April 2015. [Online]. Available:<http://www.who.int/mediacentre/factsheets/fs317/en/>
- [26] “World health organization factsheets: Chronic obstructive pulmonary disease (COPD),” online, accessed April 2015. [Online]. Available: <http://www.who.int/mediacentre/factsheets/fs315/en/>
- [27] “Parkinson’s disease information (mayo clinic website),” online, accessed April 2015. [Online]. Available: <http://www.mayoclinic.org/diseases-conditions/parkinsons-disease/basics/definition/con-20028488>
- [28] E. Dorsey, R. Constantinescu, J. Thompson, K. Biglan, R. Holloway, K. Kieburtz, F. Marshall, B. Ravina, G. Schifitto, A. Siderowfet al., “Projected number of people with Parkinson disease in the most populous nations, 2005 through 2030,” *Neurology*, vol. 68, no. 5, pp. 384– 386, 2007.
- [29] S. Xu, Y. Zhang, L. Jia, K. E. Mathewson, K.-I. Jang, J. Kim, H. Fu, X. Huang, P. Chava, R. Wang, S. Bhole, L. Wang, Y. J. Na, Y. Guan, M. Flavin, Z. Han, Y. Huang, and J. A. Rogers, “Soft microfluidic assemblies of sensors, circuits, and radios for the skin,” *Science*, vol. 344, pp. 70–74, 2014.
- [30] D.-H. Kim, R. Ghaffari, N. Lu, and J. A. Rogers, “Flexible and stretchable electronics for biointegrated devices,” *Annual Review of Biomedical Engineering*, pp. 113–128, 2012.